


Cell Type CP-V9J Specifications

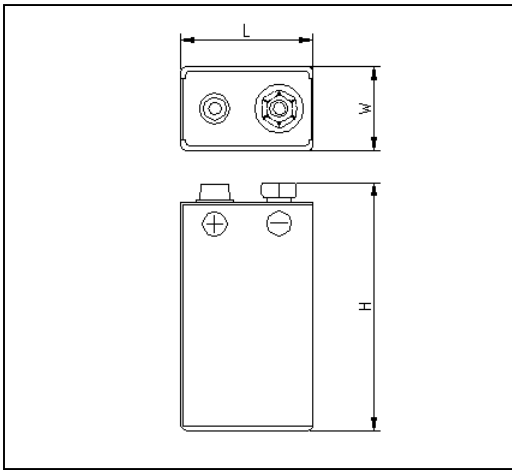

Nominal Voltage (V)	9	
Nominal Capacity (mAh) *1	1000	
Standard Discharge Current (mA)	0.5	
Operating Temperature Range (°C) *2	-40 ~ +85	
Dimensions (mm)	Length (L)	27.0
	Width (W)	17.0
	Height (H)	48.5
Approx. Weight (g)	32	


- *1 Nominal capacity is determined at an end voltage of 6.0V when the battery is allowed to discharge at a standard current level at +23°C.
 *2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.

Note) Battery Handling Precautions


English) http://www.fdk.com/battery/lithium_e/handling_precaution.html
 Japanese) http://www.fdk.co.jp/battery/lithium/handling_precaution.html

Typical Characteristics


Temperature Discharge Characteristics

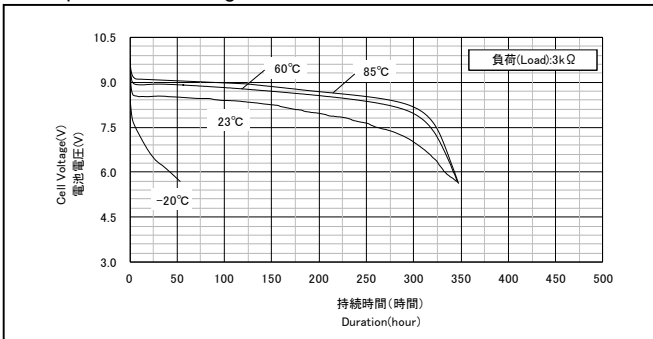


Temperature Discharge Characteristics

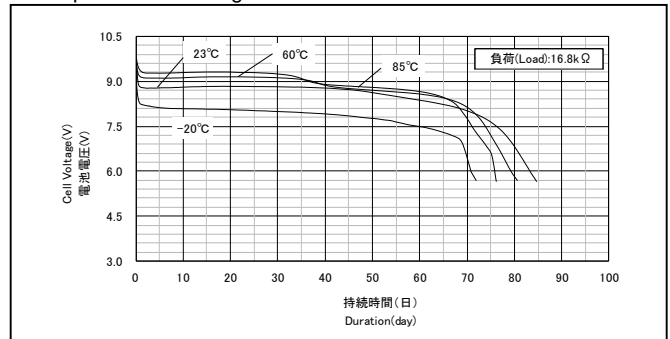


Temperature Discharge Characteristics

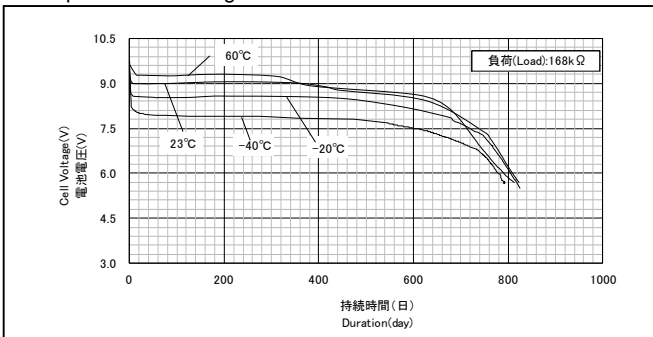

Discharge Characteristics after Storage

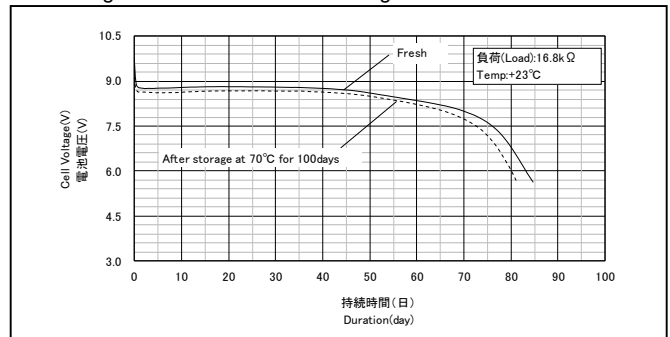

Discharge Load vs. Capacity

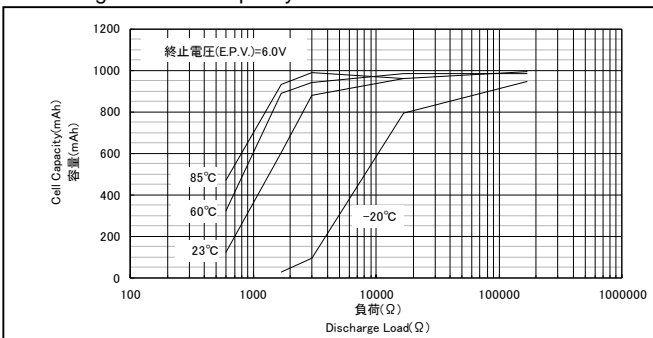

Discharge Load vs. Operating Voltage

